



## 13 dBi Outdoor PoE Access Point (5 GHz)

TEW-734APO (v1.0R)

- Wireless N300 building to building networking (5 GHz)
- Fat AP, Thin AP, Virtual AC, and Virtual AC + Thin AP modes
- Fat AP supports AP, WDS Bridge, WDS Repeater, Client, and CPE + AP modes
- Built-in 13 dBi directional sector antenna
- IP55 rated housing
- Networks to another TEW-734APO or 5 GHz access point

TRENDnet's 13 dBi Outdoor PoE Access Point, model TEW-734APO, provides wireless N300 (5 GHz) building to building connectivity. It supports Fat AP, Thin AP, Virtual Access Control (controls compatible Thin AP devices), and Virtual AC + Thin AP modes. Fat AP mode supports a variety of installation scenarios with Access Point (AP), WDS Bridge, WDS Repeater, Client, and CPE + AP modes. The rugged IP55 rated TEW-734APO comes with a proprietary PoE injector and a pole mounting kit.



## Building to Building

An integrated 13 dBi directional antenna, 5 GHz WiFi N300, and an included PoE injector facilitate building to building networking.



## Installation Flexibility

Fat AP mode supports a variety of installation scenarios with Access Point (AP), WDS Bridge, WDS Repeater, Client, and CPE + AP modes.




## Outdoor Ready

Built for protected outdoor locations with an IP55 weather rating and an operating temperature range of -20 – 70 °C (-4 – 158 °F).




LED Indicators

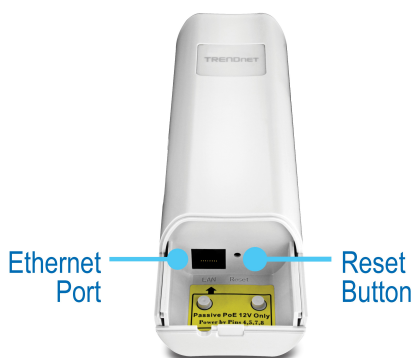

Ethernet Port

Reset Button


## (Included PoE injector)

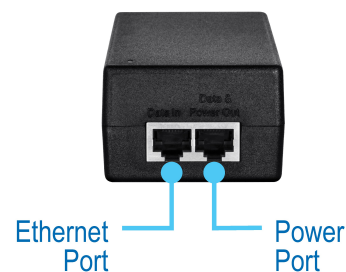

Ethernet Port

Power Port

## Networking Solution

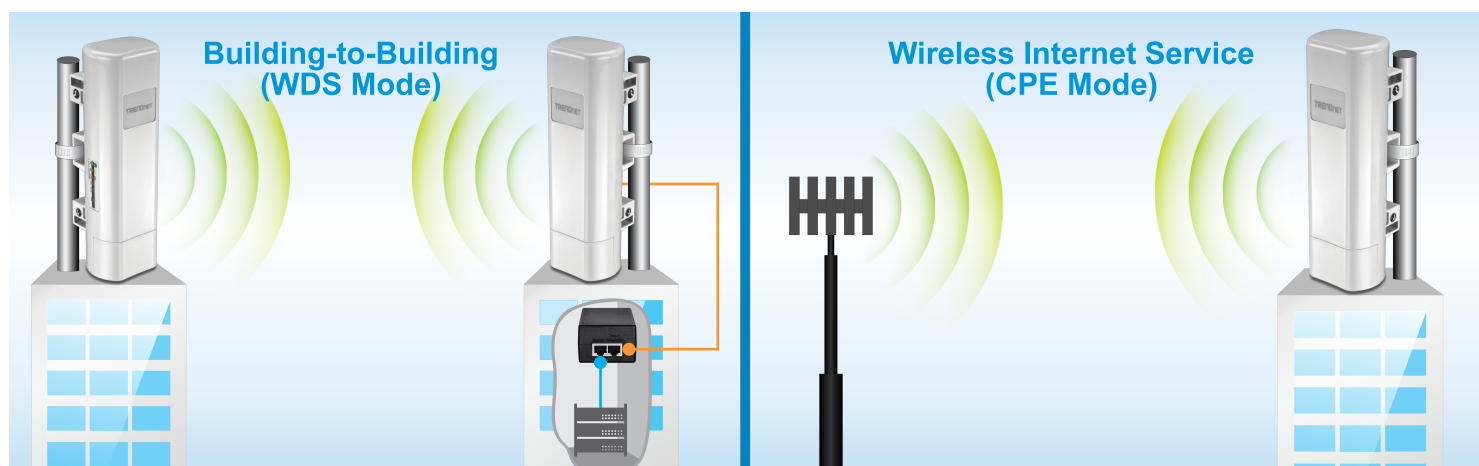



## Multi-Mode Support

Supports Fat AP, Thin AP, Virtual Access Control (controls compatible Thin AP devices), and Virtual AC + Thin AP modes



## Fat AP Mode

Fat AP mode supports a variety of installation scenarios with Access Point (AP), WDS Bridge, WDS Repeater, Client, and CPE + AP modes



## Thin AP Mode

Thin AP mode supports management of the TEW-734APO by another device (such as another TEW-734APO or TEW-730APO set to Virtual Access Control) and operates in Access Point (AP) mode only



## Virtual Access Control (AC) Mode

Virtual Access Control mode manages other compatible access points (TEW-734APO, TEW-730APO) set to Thin AP



## Wireless N300 (5 GHz)

Compliant with 802.11n/a technology (5 GHz spectrum) with data rates up to 300 Mbps



## Directional Antenna

Built in 13 dBi directional antenna



## Outdoor Rated

Durable enclosure with an IP55 outdoor weather rating



## Power over Ethernet (PoE)

Comes with a proprietary PoE injector (non-802.3af compliant)



## Logs

Real time logs and statistics help trouble shooting



## Encrypted Wireless

Support for wireless encryption of up to WPA2



## Mounting Hardware

Pole mounting hardware included

## Specifications

### Standards

- IEEE 802.3
- IEEE 802.3u
- IEEE 802.1d
- IEEE 802.1p
- IEEE 802.1Q
- IEEE 802.1X
- IEEE 802.11a
- IEEE 802.11f
- IEEE 802.11n (up to 300 Mbps)

### Hardware Interface

- 1 x 10/100 Mbps (proprietary PoE) port\*\*
- Reset button
- LED indicators
- Grounding point

### Special Features

- IP55 weather rated
- 802.1Q VLAN assignment per SSID

### Access Control

- Wireless encryption: WEP, WPA/WPA2-PSK, WPA/WPA2-RADIUS
- Firewall (CPE Mode): NAT, Port Forwarding, DMZ Host
- Access Controls: MAC, IP Filter, Port Filter, Per-SSID client limiting
- 802.1Q VLAN

### QoS

- WMM
- Traffic Shaping

### Operation Modes

- Fat AP
- Thin AP
- Virtual AC
- Virtual AC + Thin AP

### FAT AP Modes

- Access Point (AP)
- Client
- AP Repeater

- Bridge (WDS)
- WDS Repeater

### SSID

- Up to 8 SSIDs

### Internet Connection Types (CPE mode)

- Dynamic IP (DHCP)
- Static IP (Fixed)
- PPPoE (Dynamic IP)

### Management/Monitoring

- Local/remote web based management (HTTP, HTTPS)
- Local/remote CLI based management (Telnet, SSH)
- SNMP v2/v3
- CPE Management
- Upgrade firmware
- Backup/restore configuration
- Event logging
- Syslog
- Reboot
- Restore to factory defaults
- Ping test
- Ping Watchdog
- Trace Route
- STP
- STP forward delay
- Traffic Shaping
- MAC based access control

### Frequency

- FCC: 5.15GHz~5.25GHz ; 5.725GHz~5.85GHz
- ETSI: 5.15GHz~5.35GHz; 5.47GHz~5.725GHz

### Wireless Channels

- FCC: 36, 40, 44, 48, 149, 153, 157, 161, 165
- ETSI: 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 132, 136, 140

### Modulation

- 802.11a: BPSK, QPSK, 16-QAM, 64-QAM with OFDM

- 802.11n: BPSK, QPSK, 16-QAM, 64-QAM with OFDM

### Antenna Gain

- 13 dBi internal directional antenna

### Wireless Output Power/Receiving Sensitivity

- 802.11a: FCC/ETSI: FCC: 14 dBm (max.), ETSI: 15 dBm (max.)/-70 dBm (typical) @ 54 Mbps
- 802.11n: FCC/ETSI: FCC: 17 dBm (max.), ETSI: 15 dBm (max.)/-62 dBm (typical) @ 300 Mbps

### EIRP

- FCC: up to 30 dBm (with built in 13 dBi antenna)
- ETSI: up to 28 dBm (with built in 13 dBi antenna)

### Power

- Input: 100 – 220 V, 50 - 60 Hz, 0.6 A
- Output: 24 V / 1 A Consumption: 12 Watts Max.

### Operating Temperature

- -20 - 70° C (-4 - 158° F)

### Operating Humidity

- Max. 95 % non-condensing

### Certifications

- CE
- FCC

### Dimensions

- 205 x 64 x 61 mm (8.1 x 2.5 x 2.4 in.)

### Weight

- 0.8 kg (1.8 lbs.)

### Warranty

- 3 year limited

### Package Contents

- TEW-734APO
- CD-ROM (User's Guide)
- Quick Installation Guide
- Poll mounting hardware
- Proprietary PoE injector (24 V, 1 A)
- Power cord
- Grounding wire

\* Effective wireless coverage may vary depending on the wireless device's output power, antenna gain, antenna alignment, receiving sensitivity, and radio interference. Additionally environmental factors such as weather conditions, physical obstacles, and other considerations may affect performance. For optimal results, we recommended consulting a professional installer for site survey, safety precautions, and proper installation.

\*\*Recommended max. PoE cable length of 70 m

