



IS3000 and DT8000 Series

IS3012, IS3016, DT8012F4 and DT8016F4

FAMILY OF WIRED PIR and DUAL TEC® Motion Detectors

Designed with the installer in mind, these high performance small form factor motion detectors offer a trouble-free, out of the box experience to simplify the install process and reduce install time. With the passive infrared IS3012 and IS3016 and DUAL TEC DT8012F4 and DT8016F4, optimum performance is achieved using custom developed extended

range Fresnel optics, look down, cover and wall tamper, and selectable pet immunity. Leading edge sensing technologies and a wide range of models to suit the requirements of most applications, Honeywell's family of IS3000 and DT8000 motion detectors will maximize intruder detection while diminishing false alarms.

Features:

- **Sleek, Sturdy Housing**

The sleek, sturdy housing fits into a variety of residential and building styles and blends with any room décor. ABS plastic is used for shock and impact protection. The housing offers a convenient wiring channel, knockouts for mounting and wiring, and easy access to wiring terminals. To make installation easier, mounting screws are conveniently secured inside the detector rear housing.

- **Sealed Optics and Electronics**

The optics and electronics are assembled into the front enclosure and sealed with a protective cover to prevent damage during installation. The sealed optical chamber also prevents drafts and insects from affecting the detector.

- **Integrated screw retention features**

To mount the detector on the wall, the installer will insert the screw in the integrated mounting feature where it will be automatically held in place, making mounting the detector easy and quick.

- **Uniform Sensitivity Optics**

The custom designed Fresnel lens provides the same sensitivity for human targets at the edge of the pattern as exists directly in front of the detector, giving these detectors consistent coverage throughout the protected area.

- **Wall-to-Wall Coverage**

Wide and long detection coverage with look-down zone for coverage range protection that exceeds similar products in the market.

- **Advanced DualCore Signal**

Processing (DUAL TEC) DualCore signal processing analyzes PIR and microwave signals through the microcontroller. It supports a multitude of advanced functions, including concurrent diagnostics, digital fluorescent light interference filter, digital adaptive microwave threshold, adaptive baselines and bidirectional temperature compensation.

- **False Alarm Immunity**

The IS3000 and DT8000 family is designed to meet false alarm standards including NF&A2P two shields and EN50131-2-2 or EN50131-2-4. Microprocessor control helps filter out real signals from false sources.

- **Pet-friendly Selectivity**

Installers can turn pet immunity on or off with the flip of a DIP switch. When pet immunity is enabled, the detector can distinguish between signals caused by humans and signals caused by pets up to 45kg.

- **Patented Mirror Look Down**

Provides better coverage up close with multiple zones in the look-down area.

- **PIR White Light Immunity**

A patented black bug guard reduces false alarms by providing 6,500 lux of white light immunity. This helps reduce false alarm problems caused by lights, flashlights or reflective objects.

- **Flexible mountings**

The IS3000 and DT8000 family mounts on walls, in corners or on ceilings, with heights from 2.1 m - 2.7 m. The IS3000 and DT8000 family works with the SMB10 family of swivel brackets.

IS3000 and DT8000 Series


IS3012 and DT8012F4

FAMILY OF WIRED PIR and DUAL TEC® Motion Detectors


Specifications	IS3012	DT8012F4
Range	12 m x 17 m	12 m x 17 m
Power	9.0 - 15 VDC; 7 mA typical, 11 mA maximum, 12 VDC; AC Ripple: 3 V peak-to-peak at nominal 12 VDC	9.0 - 15 VDC; 9 mA typical, 14 mA maximum, 12 VDC; AC Ripple: 3 V peak-to-peak at nominal 12 VDC
Alarm Relay	Energized Form A; 30 mA, 25 VDC, 22 Ohms resistance maximum. Alarm Relay Duration: 3 seconds	Energized Form A; 30 mA, 25 VDC, 22 Ohms resistance maximum. Alarm Relay Duration: 3 seconds
Tamper	Cover & Wall; (NC with cover installed) Form A; 30 mA, 25 VDC	Cover & Wall; (NC with cover installed) Form A; 30 mA, 25 VDC
Microwave Frequencies	-	10.525 GHz
RFI Immunity	20V/m 10-1000 MHz, 15V/m 1000-2700 MHz	20V/m 10-1000 MHz, 15V/m 1000-2700 MHz
PIR White Light Immunity	6,500 Lux typical	6,500 Lux typical
Fluorescent Light Filter	-	50 Hz/60 Hz
Operating Temperature	-10°C to 55°C	-10°C to 55°C
Relative Humidity	5 to 93%; non-condensing	5 to 93%; non-condensing
Temperature Compensation	Advanced Dual Slope	Advanced Dual Slope
Dimensions	9.8 cm H x 5.7 cm W x 4.35 cm D	9.8 cm H x 5.7 cm W x 4.35 cm D
Weight	85 g (net weight)	102 g (net weight)
Pet Immunity	45kg	45kg
Approval Listings	EN50131-2-2 Grade 2 Class II, INCERT, IMQ, SBSC, FG, F&P, NCP, GOST-R	EN50131-2-4 Grade 2 Class II, INCERT, IMQ, SBSC, FG, F&P, NCP, GOST-R

IS3012/DT8012F4 DETECTION PATTERNS

- Top View

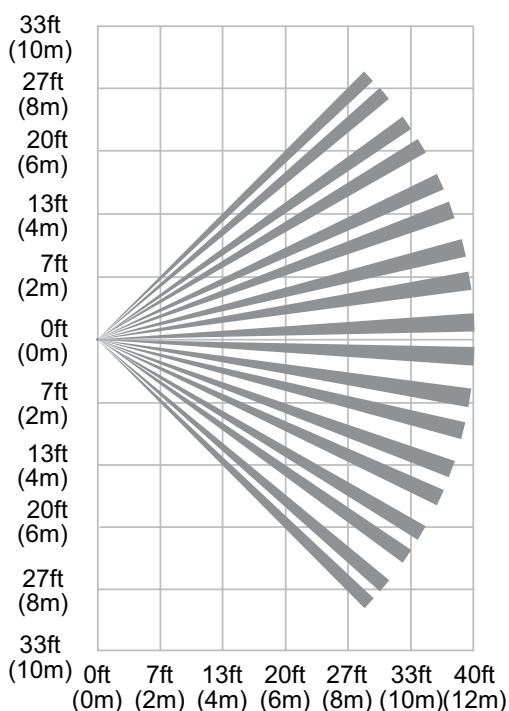

- Side View

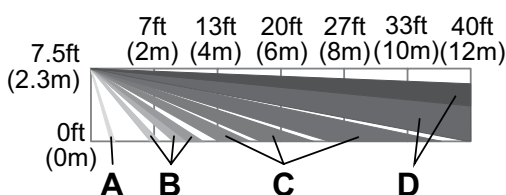

- Zones

A	2 Look-down
B	18 Lower
C	46 Intermediate
D	36 Long

IS3000 and DT8000 Series


IS3016 and DT8016F4

FAMILY OF WIRED PIR and DUAL TEC® Motion Detectors


Specifications	IS3016	DT8016F4
Range	16 m x 22 m	16 m x 22 m
Power	9.0 - 15 VDC; 7 mA typical, 11 mA maximum, 12 VDC; AC Ripple: 3 V peak-to-peak at nominal 12 VDC	9.0 - 15 VDC; 9 mA typical, 14 mA maximum, 12 VDC; AC Ripple: 3 V peak-to-peak at nominal 12 VDC
Alarm Relay	Energized Form A; 30 mA, 25 VDC, 22 Ohms resistance maximum. Alarm Relay Duration: 3 seconds	Energized Form A; 30 mA, 25 VDC, 22 Ohms resistance maximum. Alarm Relay Duration: 3 seconds
EOL resistors	Alarm & tamper: 1K, 2.2K, 4.7K & 5.6K; default = 1K	Alarm & tamper: 1K, 2.2K, 4.7K & 5.6K; default = 1K
Tamper	Cover & Wall; (NC with cover installed) Form A; 30 mA, 25 VDC	Cover & Wall; (NC with cover installed) Form A; 30 mA, 25 VDC
Microwave Frequencies	-	10.525 GHz
RFI Immunity	20V/m 10-1000 MHz, 15V/m 1000-2700 MHz	20V/m 10-1000 MHz, 15V/m 1000-2700 MHz
PIR White Light Immunity	6,500 Lux typical	6,500 Lux typical
Fluorescent Light Filter	-	50 Hz/60 Hz
Operating Temperature	-10°C to 55°C	-10°C to 55°C
Relative Humidity	5 to 93%; non-condensing	5 to 93%; non-condensing
Temperature Compensation	Advanced Dual Slope	Advanced Dual Slope
Dimensions	9.8 cm H x 5.7 cm W x 4.35 cm D	9.8 cm H x 5.7 cm W x 4.35 cm D
Weight	85 g (net weight)	102 g (net weight)
Approval Listings	EN50131-2-2 Grade 2 Class II, INCERT, IMQ, SBSC, FG, F&P, NCP, GOST-R	EN50131-2-4 Grade 2 Class II, INCERT, IMQ, SBSC, FG, F&P, NCP, GOST-R

IS3016/DT8016F4 DETECTION PATTERNS

- Top View

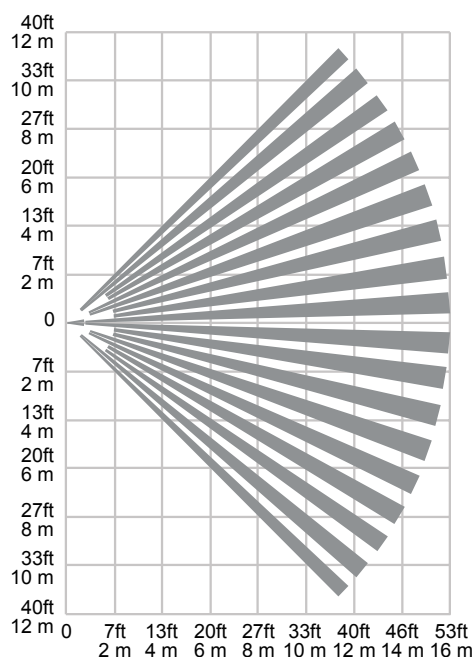

- Side View

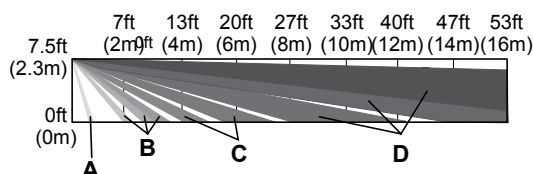

- Zones

A	2 Look-down
B	18 Lower
C	20 Intermediate
D	54 Long

IS3000 and DT8000 Series

IS3012, IS3016, DT8012F4 and DT8016F4

FAMILY OF WIRED PIR and DUAL TEC® Motion Detectors

ORDERING

IS3012	Pet Immune PIR Motion Detector, 12m x 17m
IS3016	PIR Motion Detector, 16m x 22m
DT8012F4	Pet Immune DUAL TEC Motion Detector, 12m x 17m
DT8016F4	DUAL TEC Motion Detector, 16m x 22m

ACCESSORIES*

SMB10	Swivel Mount Bracket (0-000-110-01)
SMB10C	Swivel Mount Ceiling Bracket (0-000-111-01)
SMB10T	Swivel Mount Bracket with Tamper (0-000-155-01)

Note: Honeywell reserves the right to alter the specification of products without prior notice.

For additional information, please visit

www.honeywell.com/security/it

Honeywell Security Group

Via della Resistenza, 53/59

20090 Buccinasco

Milano

Italia

Tel: +39 (0) 248 880 51

www.honeywell.com

HSC-ISDTF-02-ENIT(0914)DS-E
September 2014
© 2014 Honeywell International Inc.

The Honeywell logo is displayed in a bold, red, sans-serif font.