



HD ONVIF | S | G | O

H3W2GR1V H3W4GR1V

Network TDN Low-Light WDR 2MP/4MP Indoor Dome

OPERATIONAL	
VIDEO STANDARD	NTSC/PAL
SCANNING SYSTEM	Progressive scan
IMAGE SENSOR	H3W2GR1V: 1/2.8" 2Megapixel progressive scan CMOS H3W4GR1V: 1/3" 4Megapixel progressive scan CMOS
NUMBER OF PIXELS (H × V)	2MP - 1920x1080
MINIMUM ILLUMINATION	H3W2GR1V: Colour: 0.001Lux @f/1.6, B/W: 0Lux@f/1.6(IR on) H3W4GR1V: Colour: 0.01Lux @f/1.6, B/W: 0Lux @f/1.6(IR on)
S/N RATIO	50db minimum
ELECTRONIC SHUTTER SPEED	Auto/Manual, 1/3~1/100000s
IR DISTANCE	20m
DAY/NIGHT	Mechanical ICR (ON / OFF / AUTO selectable)
BACKLIGHT COMPENSATION	BLC / HLC / WDR / SAC(Scene Adaptive Control)
WIDE DYNAMIC RANGE (WDR)	120dB (50/60fps off)
WHITE BALANCE	Auto/Natural/Street Lamp/Outdoor/Manual/Customize Region
GAIN CONTROL	Auto/Manual
NOISE REDUCTION	3D Noise Reduction (ON / OFF selectable)
PRIVACY MASKING	Up to 4 configurable areas
DEFOG	Auto/Manual/Off
LENS	2.7-13.5 mm MFZ, DC IRIS, optical zoom 5x lens F1.6
ANGLE OF VIEW	H3W2GR1V: FOV depending on different resolution H: 110° - 32°, V: 59° - 19° H3W4GR1V: FOV depending on different resolution H: 110° - 30°, V: 53° - 18°
AUDIO/TWO-WAY	Line In/Out, 1 built-in Mic
ALARM INPUT/OUTPUT	2 In / 1 Out
ANALOG OUTPUT SUPPORT	Supported
ETHERNET	RJ-45 (10/100Base-T)
IP SPECIFICATIONS	
VIDEO COMPRESSION	H.265+, H.265, H.264 and MJPEG bit rate control (CBR and VBR)
RESOLUTION	16:9 H3W2GR1V: 1080p (1920×1080)/ 720p (1280×720) H3W4GR1V: 3M (2304×1296)/1080p (1920×1080)/ 720p (1280×720)
	4:3 1.3M (1280×960)/VGA (640×480)
	OTHER H3W2GR1V: D1 (704×576/704×480)/ CIF (352×288/352×240) H3W4GR1V: 4M(2688x1520)/(2560x1440), /D1 (704×576/704×480)/ CIF(352×288/352×240)
FRAME RATE	MAIN STREAM H3W2GR1V: 1080P(1~50/60fps WDR off) H3W4GR1V: 4M(1~25/30fps)
	SUB STREAM H3W2GR1V: D1(1~50/60fps WDR off) H3W4GR1V: D1(1~25/30fps)
	THIRD STREAM H3W2GR1V: 1080P(1~25/30fps) H3W4GR1V: 4M(1~25/30fps)
	H3W2GR1V: Simultaneous Main stream and Third stream at 1080P (Main stream +Third stream <=68fps, WDR off, 2nd stream off) H3W4GR1V: Simultaneous Main stream and Third stream at 4MP (Main stream +Third stream <=34fps, 2nd stream off)
AUDIO COMPRESSION	G.711a/ G.711Mu/ AAC/G.726
AUDIO STREAM	Full duplex, simplex

IP SPECIFICATIONS	
SUPPORTED WEB BROWSERS	
SUPPORTED OS	
SUPPORTED PROTOCOLS*	
COMPATIBILITY	
MAXIMUM USERS ACCESS	
SECURITY	
BUILT-IN ALARM & EVENT	EVENT TYPE
	EVENT LINKAGE
	EVENT OUTPUT
MICRO SD	
MICRO SD FUNCTION	
LANGUAGES SUPPORTED	
ELECTRICAL	
POWER SUPPLY	
LONG DISTANCE POE SUPPORT	
AC FREQUENCY	
POWER CONSUMPTION	
AUXILIARY POWER SUPPLY	
MECHANICAL	
DIMENSIONS	
WEIGHT	
CONSTRUCTION	
CONSTRUCTION COLOR	
ENVIRONMENTAL	
OPERATING TEMPERATURE	
RELATIVE HUMIDITY	
REGULATORY	
EMISSIONS	
IMMUNITY	
SAFETY	
ROHS	

* Some development may be required in specific user cases to support some of these protocols in the field as they mature over time.

Network TDN Low-Light WDR 2MP/4MP Indoor Dome

RECOMMENDED ACCESSORIES

SYSTEM INTEGRATION

ONVIF support and open API software integration. Refer to www.onvif.org for the ONVIF specification and the Honeywell Open Technology Alliance website (<http://www.security.honeywell.com/hota/>) to learn more about our open and integrated solutions.





HOUSINGS AND MOUNTS

H3G-CB		Replacement Dome (Clear)
H3G-SB		Replacement Dome (Smoke)
HD3-MK2		Wall Mount Bracket
HPOE3X		3X Long Distance POE Switch
HLR1001		IP over Coax Converter
HD3IP-5K+4S BOX		4S Box (need to purchase from market)
HD3IP-5K1+HD5-MK2 + HD5CBL/HD5CWH/HD5TBL/HD5TWH		Plenum Box

ORDERING

H3W2GR1V	Network TDN Low Light WDR IR Indoor Dome Camera, 1/2.8" 2 Megapixel progressive scan CMOS, 2.7-13.5 mm MFZ, 3 IR LEDs, PoE, H.265.
H3W4GR1V	Network TDN WDR IR Indoor Dome Camera, 1/3" 4 Megapixel progressive scan CMOS, 2.7-13.5 mm MFZ, 3 IR LEDs, PoE, H.265.

DIMENSIONS

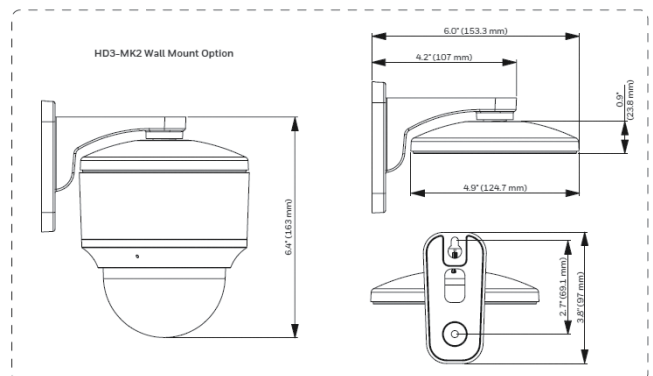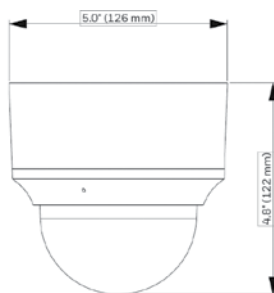

For more information

www.honeywell.com/security/uk

Honeywell Security

Aston Fields Road
Whitehouse Industrial Estate
Runcorn, Cheshire, WA7 3DL
United Kingdom
Tel: +44 (0)8448 000 235

Honeywell Security Office
Emaar Business Park, Sheikh Zayed Road
Building No. 2, 2nd floor, 201
Post Office Box 232362
Dubai, United Arab Emirates
Tel: +971 44541704
www.honeywell.com

ONVIF and the ONVIF logo are trademarks of ONVIF Inc. Honeywell reserves the right, without notification, to make changes in product design or specifications.

HSV-H3WxGR1V-01-UK(0618)DS-Z
© 2018 Honeywell International Inc.

Honeywell