

AV3115/AV5115

3 or 5 Megapixel Compact H.264 IP MegaVideo® Camera

Arecont Vision
megapixel technology...
beyond imagination

AV3115 3MP Color
AV3115DN 3MP Day/Night
AV3115AI 3MP Auto-Iris

AV5115 5MP Color
AV5115DN 5MP Day/Night
AV5115AI 5MP Auto-Iris



The **Fastest** Frame Rate at 3MP & 5MP resolution on the market :
21 fps @ 3MP, 14 fps @ 5MP

Compact Package for size constraints of environmental housing

Address **cost sensitive** H.264 market

Arecont Vision Advantages:

- 3 & 5 Megapixel Configurations
- Dual Encoder H.264 (MPEG Part 10) and MJPEG
- Fastest MegaPixel Image Rates
- Unparalleled High Definition Resolution, 2592x1944
- Binning technique improve low-light performance
- PSIA Compliance
- Privacy Mask
- Extended Motion Detection Grid
- Flexible Cropping
- Bit Rate Control
- Multi-Streaming
- Forensic Zooming
- Cost Efficiency
- Compact Package
- Color, Day/Night and Auto-Iris versions
- PoE and Auxiliary power: 12-48 VDC/ 24VAC

Specification sheets subject to change without notice

Made in USA



Model Numbers:

AV3115	3MP Color
AV3115DN	3MP Day/Night
AV3115AI	3MP Auto-Iris
AV5115	5MP Color
AV5115DN	5MP Day/Night
AV5115AI	5MP Auto-Iris

Imaging

- 3 megapixel CMOS image sensor (AV3115)
- 5 megapixel CMOS image sensor (AV5115)
- Full resolution: 2592 (H) x 1944 (V) pixel array
- 1/2.5" optical format
- 2.2 µm pixel pitch
- Bayer mosaic RGB filter
- Minimum illumination of:
 - Color(non-binned): 0.3 Lux @ F1.4
 - Color(binned): 0.15 Lux @ F1.4
 - Day/Night: 0 Lux, IR sensitive
- Dynamic range 70.1 dB
- Maximum SNR 44.1 dB

Full Field of View (FOV) Resolution

Model Numbers	Full FOV Resolution	1/4 Resolution
AV3115	3MP 2048 (H) x 1536 (V)	1024(H)x768(V)
AV5115	5MP 2592 (H) x 1944 (V)	1296(H)x972(V)

Cropped (FOV) Resolution

Flexible Cropping - Crop to 2 pixels in H.264 and 1 pixel in JPEG

- 2560x1600 QWXGA (AV5115)
- 2048x1536 3MP (AV5115)
- 1920x1200 WUXGA
- 1920x1080 HDTV-1080p
- 1600x1200 2MP
- 1280x1024 1.3MP
- 1280x720 HDTV - 720p
- 640x480 VGA

Data Transmission

- | | |
|---|--|
| <ul style="list-style-type: none"> • Video frame rate up to: AV5115: <ul style="list-style-type: none"> • 14fps @ 2592x1944 • 16.5fps @ 2560x1600 • AV3115/5115: <ul style="list-style-type: none"> • 21fps @ 2048x1536 • 31fps @ 1600x1200 • 29fps @ 1920x1080 • 41fps @ 1280x1024 | <ul style="list-style-type: none"> • Video frame in binned mode up to: AV5115: <ul style="list-style-type: none"> • 34fps @ 1286x972 • 41fps @ 1280x800 • AV3115/5115: <ul style="list-style-type: none"> • 47fps @ 1024x768 • 64fps @ 800x600 • 64fps @ 860x540 • 64fps @ 640x512 |
|---|--|

- Compression type
 - H.264 (MPEG4, Part 10) / Motion JPEG
 - 21 levels of quality
- TFTP, HTTP, RTSP, RTP/TCP, RTP/UDP image transmission protocols
- 100Base-T Ethernet Network Interface
- Data rate
 - bit rate control from 100Kbps to 10Mbps
 - unthrottled data rate up to 55Mbps
- Multi-streaming: 8 non-identical streams

Electrical

- General purpose opto-coupled input and output
- Power over Ethernet (PoE): PoE 802.3af for camera
- Auxiliary power 12-48V DC, 24V AC
- Power consumption: 4.5 Watts maximum
- Optional DC AI connection (AV3115AI and AV5115AI)

Programmability

- Privacy mask
- Flexible cropping
- Auto Exposure (AE) and Gain Control (AGC) >120dB
- On-camera real-time motion detection with 1024 detection zones
- Auto backlight compensation
- Auto multi-matrix white balance
- 50/60Hz selectable flicker control
- Electronic pan, tilt, zoom (PTZ)
- Electronic image flip - 180 degree rotation
- Resolution windowing down to 1x1 pixel for JPEG and 2x2 pixels for H.264
- Programmable shutter speed to help control motion blur
- MoonLight™ mode - extended exposure and proprietary noise cancellation
- Programmable resolution, brightness, saturation, gamma, sharpness, tint
- Picture-in-Picture: simultaneous delivery of full field of view and zoomed images
- Bandwidth & storage savings by running at 1/4 resolution

Regulatory Approvals / Listings

- FCC, CE, RoHS, UL

Industry standard


- PSIA compliance

Environmental

- Operating temperature -5°C (23 °F) to +60°C (140 °F)
- Stable image temperature 0°C (32 °F) to +50°C (122 °F)
- Storage temperature -20°C (-4 °F) to +60°C (140 °F)
- Humidity 0% to 90% (non-condensing)

Mechanical

- 3"W (76 mm) x 2.5"H (63.5 mm) x 1.25"D (31.7mm) (w/o lens)
- 5.8 oz (164 grams) w/o lens
- C/CS lens mount

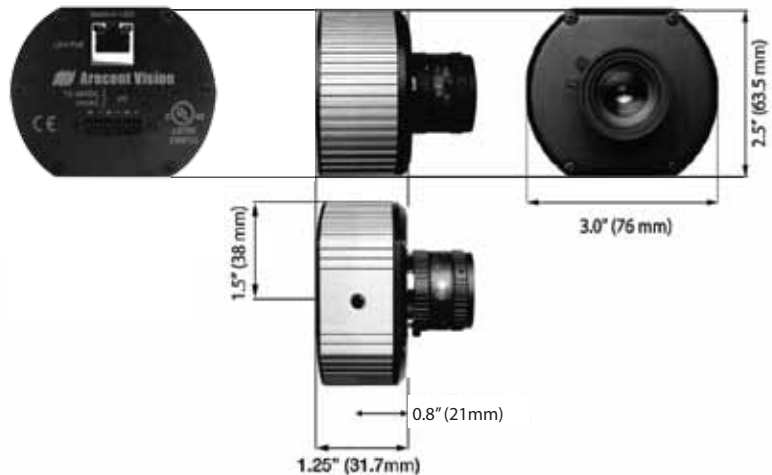

Accessories

- D4S : Indoor 4" Surface Mount Dome
- D4F : Indoor 4" In-Ceiling Mount Dome
- Dome 4-I : Indoor 4" Vandal Dome
- Dome 4-O : Outdoor 4" Vandal Dome
- Dome 5-I : Indoor 5" Recessed Dome
- HSG1-O-W : Outdoor Environmental Housing w/Heater/Blower

Lenses

- MPL4-10
- MPL4-12
- MPL8-16
- MPL4.0
- MPL6.0
- MPL8.0
- MPL33-12
- MPL12-40
- LENS4-13
- LENS4-10AI

