

# iLOFT COLLECTION

VIDEO DOOR ENTRY SYSTEMS

Hands-free

**FERMAX**




Pure lines. Essence. Seduction.  
A contemporary jewel.

Beauty sustained by high performance electronics  
make **iLOFT the designer's choice.**

Featuring audio and video versions, flush and  
surface mounting versions, colour options  
and complements: there is an iLOFT model  
for each style.

**Welcome to the iLOFT COLLECTION.**

**iLOFT**  
by **FERMAX**

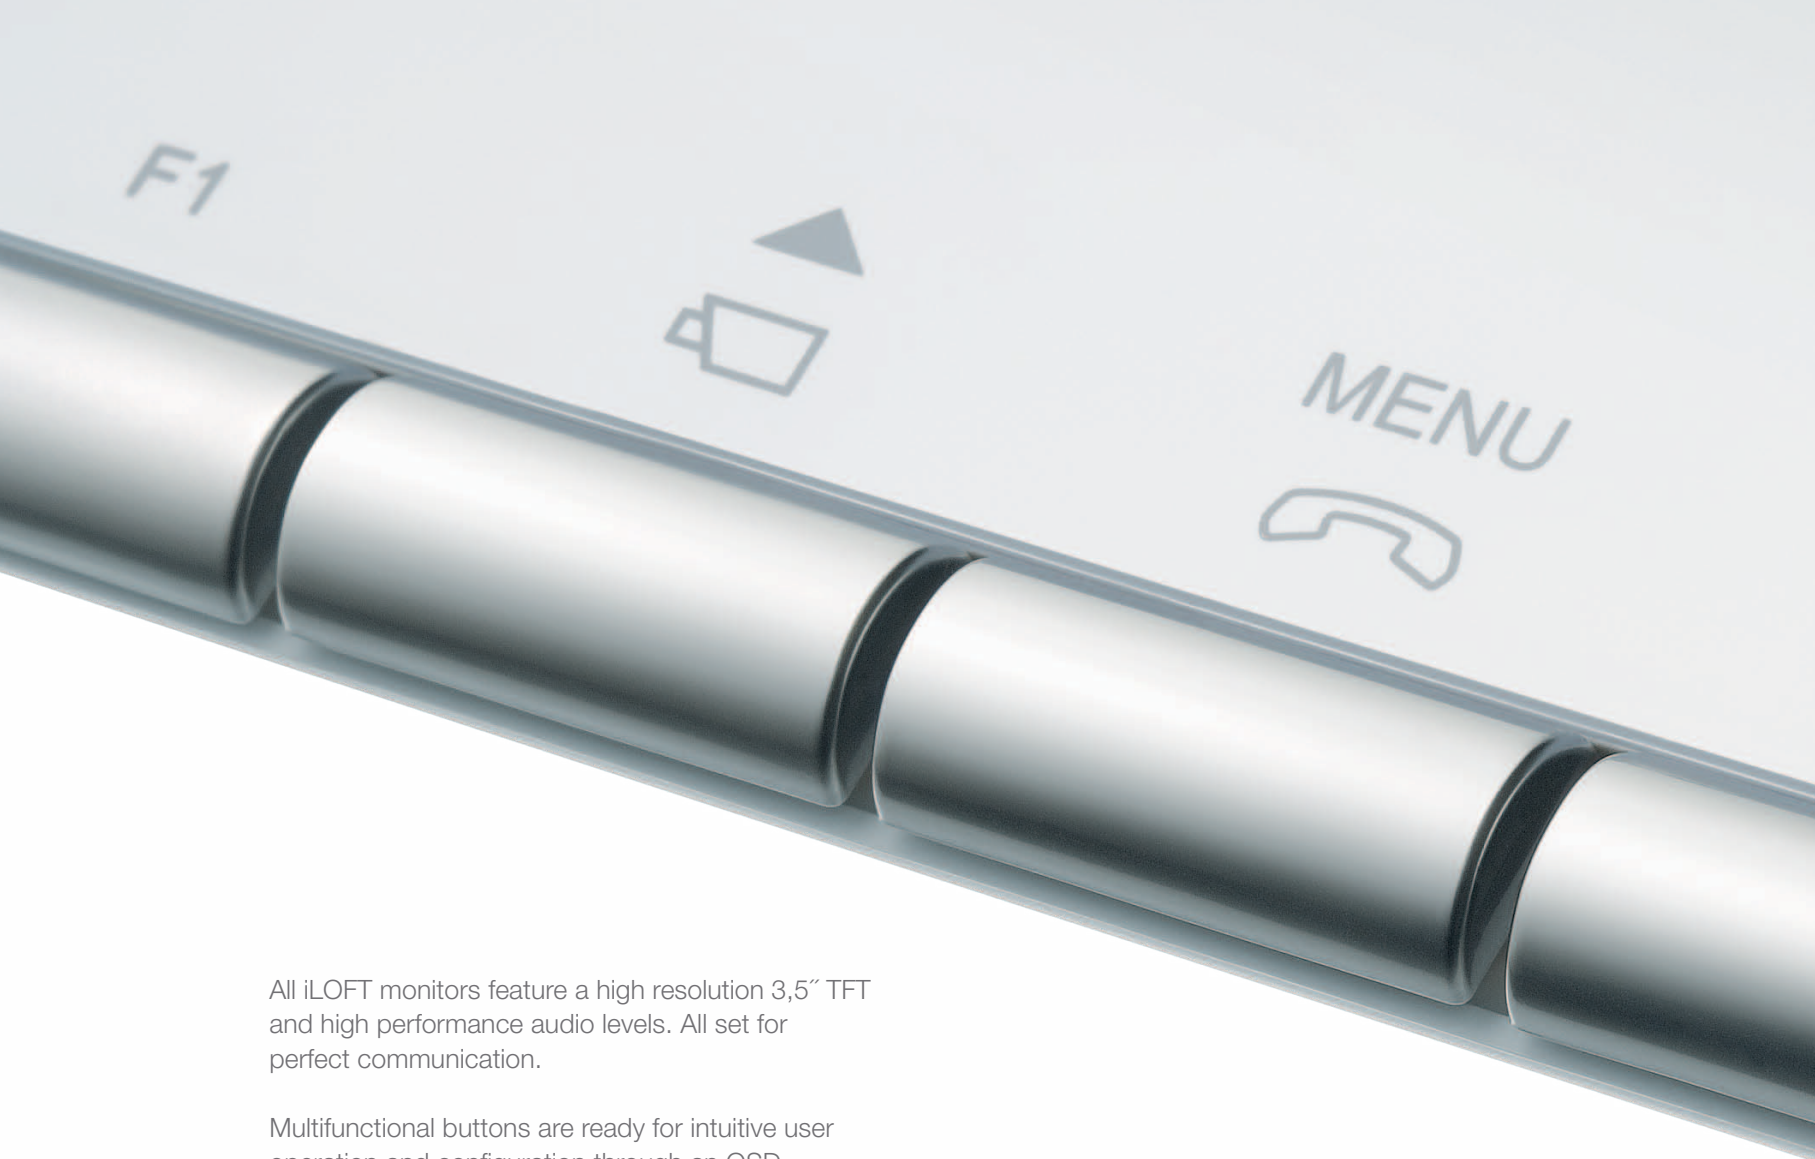

All iLOFT monitors feature a high resolution 3,5" TFT and high performance audio levels. All set for perfect communication.

Multifunctional buttons are ready for intuitive user operation and configuration through an OSD navigation menu.

The highest manufacturing standards for materials and finishes give iLOFT monitors a special touch.

**Discover the iLOFT COLLECTION.**



### AN iLOFT REFERENCE

*iLOFT has been requested by meticulous architects, design consultants and real estate developers worldwide. Reflections is an example.*

*Located in Singapore, near its historical seafront, Reflections is a 2 million m<sup>2</sup> residential compound designed by Daniel Libeskind. Six skyscrapers and eleven lower blocks for which iLOFT was the perfect match.*



*"Created by Benedito Design Studio, in Barcelona.  
A powerhouse for european industrial design that has been  
setting trends for the past 35 years".*



iLOFT MONITORS


**iLOFT**  
by **FERMAX**



## iLOFT FLUSH

An ABS body dressed by a **transparent polycarbonate sheet** for the glossiest finish.

Once flush-mounted, its maximum thickness is just **13 mm from the wall**, making it compact, light weight and ultra slim.

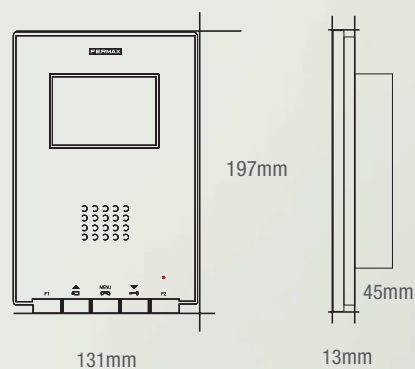

### MEASURES (mm)

Flush Monitor: 131x197x58.

FERMAX flush box: 108x158x45.

Universal flush box: 114x174x50.

### REFERENCES

- ref.5620 VDS FLUSH iLOFT MONITOR
- ref.5612 BUS2 FLUSH iLOFT MONITOR
- ref.5611 4+N FLUSH iLOFT MONITOR
- ref.5630 iLOFT FLUSH BOX

**iLOFT**  
by **FERMAX**







# iLOFT SURFACE



iLOFT surface monitor stands out for **convenient and simple** installation.


Wall fitted, it requires **no building works** and can be installed onto any kind of wall.

## MEASURES (mm)

Surface monitor: 131x197x36.

## REFERENCES

ref.5614 VDS SURFACE iLOFT MONITOR  
ref.5615 BUS2 SURFACE iLOFT MONITOR

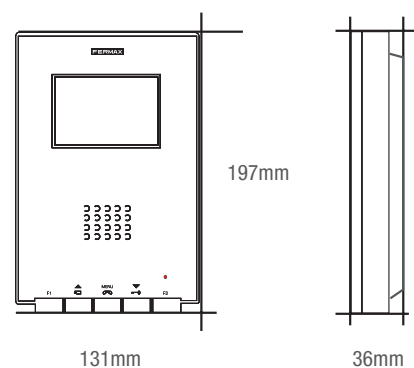

**iLOFT**  
by **FERMAX**



iLOFT COMPLEMENTS

**iLOFT**  
by **FERMAX**



# iLOFT TELEPHONE

## THE PERFECT COMPLEMENT

An audio terminal for simpler installations or as a secondary unit. **Slim and light**, the iLOFT telephone represents the modesty of elegance.

Still, it is also a technological achievement of digital audio processing to ensure high-quality and echo and interference free communication.

Built in **signalling LEDs and clear iconography** for its pushbuttons make its operation and configuration extremely intuitive.

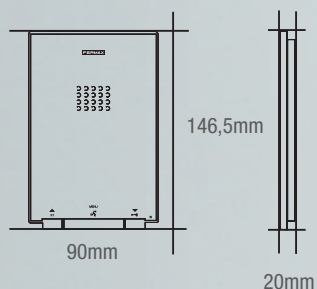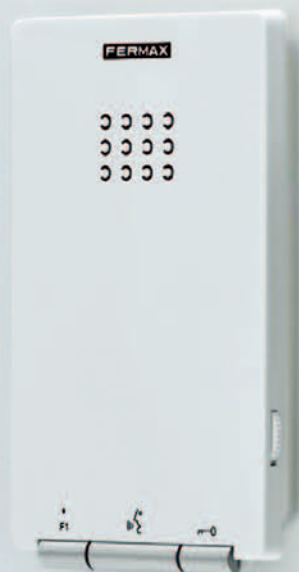

## MEASURES (mm)

Telephone: 90x146,5x20.

## REFERENCES

ref.5601 VDS iLOFT TELEPHONE

**iLOFT**  
by **FERMAX**



VOLUME CONTROL







# CRYSTAL FRAME

Both iLOFT and iLOFT PURE monitors feature a new accessory:  
**the iLOFT crystal frame.**

**A 6 mm thick bevelled glass** to be integrated in the most cutting-edge homes. Just for the sake of aesthetics or as a practical accessory to cover signs or gaps left by an older equipment.



## MEASURES (mm)

Frame: 189x256x6.

## REFERENCES

ref.5631 iLOFT GLASS FRAME

**iLOFT**  
by **FERMAX**



# COLOUR RANGE




**Different homes, personal colours.**

Each home has its style and colours are a tool for expression. iLOFT encourages **customization of the spaces.**

A colour touch below the polycarbonate skin.

**Gold, Silver and Black** are now available in addition to the standard white.

As a painter's board, **iLOFT is a vehicle for beauty.**



## REFERENCES

- ref.5633 SILVER COVER
- ref.5634 BLACK COVER
- ref.5635 GOLD COVER




**iLOFT**  
by **FERMAX**




TECHNICAL INFO

Intuitive and user-friendly, iLOFT is designed to run without any specific user configuration.

Image will come up to the screen whenever a call is received.

 opens the two way audio channel for crystal clear hands-free conversation.

 opens the access to the visitor.

Communication ends automatically after 90 seconds or when  is pressed again.



# AUTOMATIC AND HANDS-FREE OPERATION

## MULTI-FUNCTION PUSHBUTTONS



**Open/close** audio and video communication with outdoor entry panel.



**Open-door pushbutton** for access doors to the building/home and guard unit calls.



**Camera-on** turns on the outdoor entry panel camera for a peak outside without having received a call.



F1-F2

**For additional functions** set up by the installer such as calling the lift, switching a light, call to guard unit or activating a secondary relay.

▲ MENU ▼

**Digital menu** for ring tone selection, volume control and video settings.







# USER SELECTION

A simple and easy OSD menu, available in some versions, allows any user to make the most of the iLOFT functionalities.

- **Doormatic function:** allows the monitor to be set, for a given time period, to open the door automatically upon receiving a call.
- **Ring tone selection:** different melodies discriminating by the origin of the call: main outdoor entry panel, secondary access entry panel and door bell.
- **Do Not Disturb:** silent calls for those relaxing moments.




Fermax for integration.

Inductive hearing loop comes as a standard with any iLOFT Collection terminal for transmission to hearing aid devices.



Settings Selection



Melodies Selection



Not Disturb Function






Inductive Loop Selection

# INSTALLATION

## FLUSH

- 1 Install FERMAX flush box (ref.5630) or a standard box (114x174x50mm).
- 2 Fit the installation cables to the monitor connector.
- 3 Screw the monitor to the flush box and program it with the house unit number.
- 4 Mount the cover from the upper part and swing downwards to make it fit.

Once the cover is mounted, set the volume/scenes/colour level with the multifunction pushbuttons.

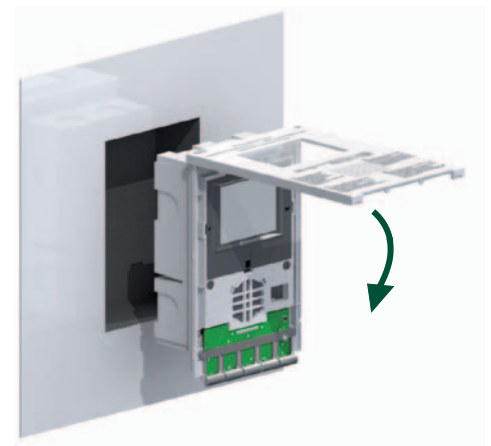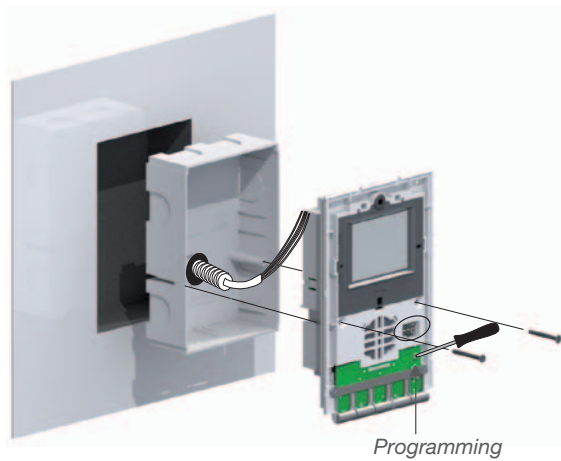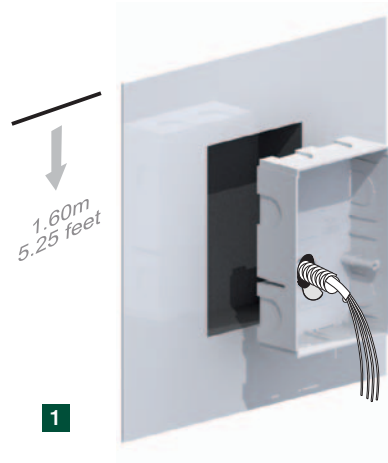


## SURFACE

- 1 Screw monitor base to wall.
- 2 Fasten the installation cables to the connectors on the back of the monitor.

Anchor the monitor, fitting it to the tabs on the base.

- 3 Mount the front cover, securing it to the left and closing with a slight tilt.

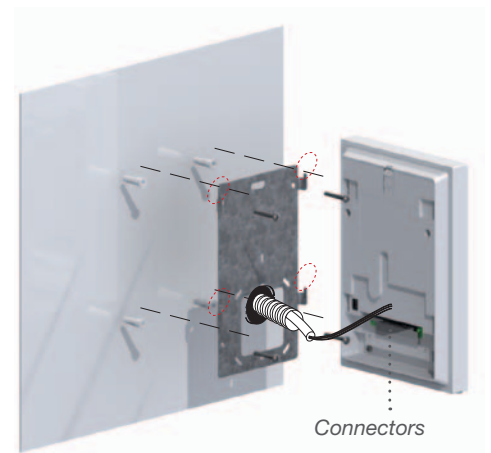



Cityline Outdoor Panel

## iLOFT COLLECTION REFERENCES

### Monitors

	FLUSH	SURFACE
Vds	5620 iLoft Monitor	5614 iLoft Monitor
Bus2	5612 iLoft Monitor	5615 iLoft Monitor
4+N	5611 iLoft Monitor	

### Complements

TELEPHONE	5601 iLoft VDS Telephone
FLUSH BOX	5630 iLoft Flush box
GLASS FRAME	5631 Crystal iLoft Frame
FRONTAL COVERS	5633 iLoft Silver Cover 5634 iLoft Black Cover 5635 iLoft Gold Cover

**iLOFT**  
by **FERMAX**

Design: FERMAX ELECTRÓNICA S.A.U.  
Photography: Enric Pérez.

**FERMAX**

Audio and Video Door Entry Systems

VIDEO DOOR ENTRY SYSTEMS

[www.fermax.com](http://www.fermax.com)